



Megapixel IP Camera

network DynaHawk™ 061 Series

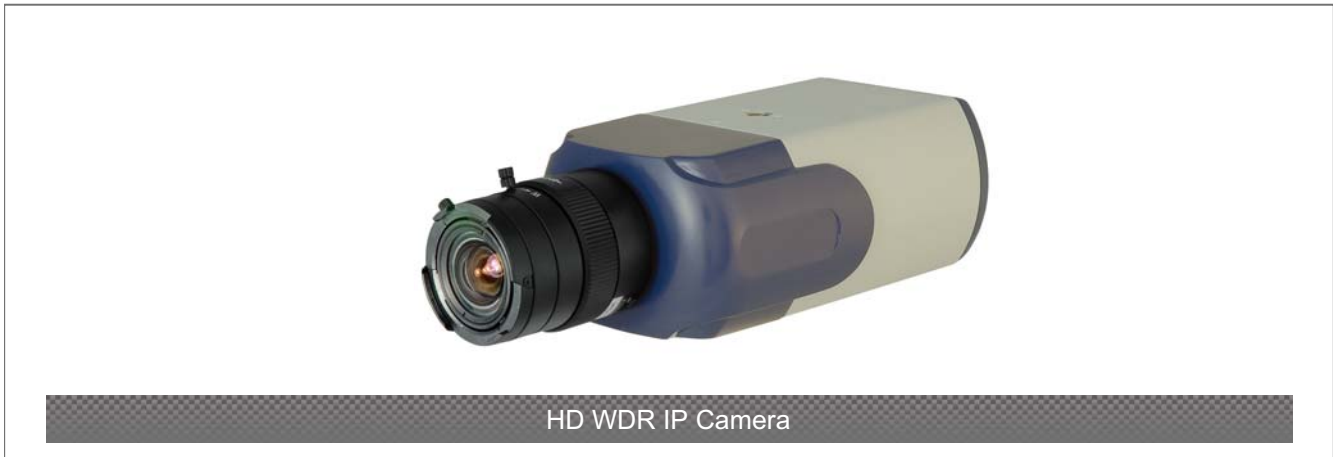


Dimension

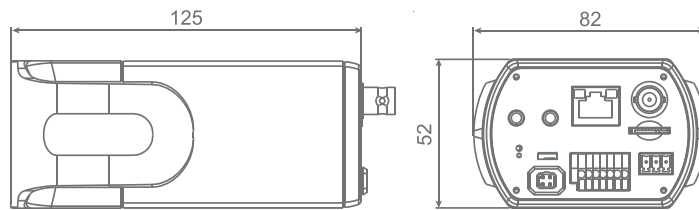


Features

- Sony Progressive Scan CCD/CMOS Sensor
- NEW** • 720p Real-time at dual streams
- H.264, MPEG-4, and MJPEG Compression
- NEW** • Integrated Real-time WDR
- NEW** • 2D / 3D Noise Reduction
 - Motion Detection
 - Electronic Image Stabilization
 - True Day/Night (ICR)
 - Micro SD Support
 - BNC Analog Output

HD

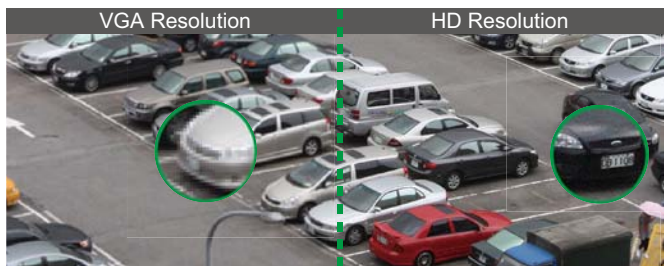

2D / 3D Noise Reduction

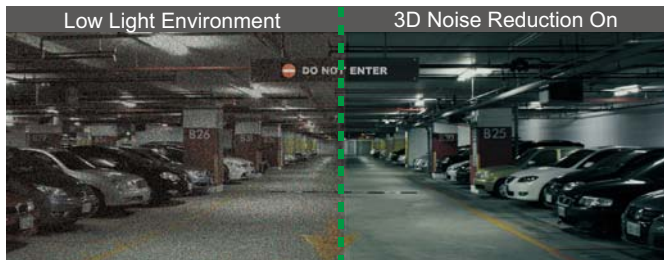

Specification

Item	NH061	
Camera		
Image Sensor	1/3" Sony Progressive CCD	1/3" Sony Progressive CMOS
Picture Elements	1280 (H) × 960 (V)	1280 (H) × 1024 (V)
Resolution	>700 TVL	
Shutter Speed	1 ~ 1/10000 sec.	
Lens		
Lens Mount	C/CS mount Lens	
Operation		
Video Compression	H.264 Baseline / MPEG-4 / MJPEG	
Video Streaming	H.264 + MJPEG Simultaneous MPEG-4 + MJPEG MJPEG + BNC	
Resolution	H.264: HD 720p / D1 / VGA / QVGA / CIF / QCIF MPEG-4: HD 720p / D1 / VGA / QVGA / CIF / QCIF MJPEG: HD 720p / D1 / VGA / QVGA / CIF / QCIF	
Frame rate	H.264: 25 / 30 fps MPEG-4: 25 / 30 fps MJPEG: 25 / 30 fps	
Image Setting	Brightness	Manual
	Exposure	Auto / Manual / Fixed Shutter
	Back Light	On / Off
	Sharpness	Manual
	Contrast	Manual
	White Balance	Auto / Manual / Indoor / Outdoor
	Digital Zoom	1× ~ 16×
	Image Rotation	Flip, Mirror, and 180° Rotate
	WDR	Off / 4 Level Adjustment
Audio	3D Noise Reduction	On / Off
	Two-way Audio	Line out, Line in/Mic in
	Compression	G.711 / G.726
Alarm	Input	5V 10kΩ pull up
	Output	Photo relay output 300VDC/AC
Network		
Interface	10/100 Mb Ethernet (RJ45)	
Protocol	TCP/IP, UDP, RTP, RTSP, HTTP, ICMP, FTP, SMTP, DHCP and IGMP	
Password Levels	User and Administrator	
Internet Browser	Internet Explorer (6.0+)	
User Account	20	
Mechanical		
Connectors	Power	3 pins terminal block
	Ethernet	RJ45
	Micro SD	SDHC support
	Audio	Stereo phone jack, Ø 3.5 mm
	Alarm	4 pins terminal block
	Auto Iris	DC drive
	Analog Video	1.0 Vp-p / 75 Ω, BNC
LED Indicator	Power, Link, ACT	
General		
Operating Temperature	0°C ~ 50°C Humidity: 10% to 90%, Non-condensing	
Power Source	DC 12V / PoE / AC 24V	
Power Consumption	6 W	4.5 W
Regulatory	CE, FCC, RoHS Compliant	
Dimension	125 × 82 × 52 mm (L × W × H) (w/o lens)	
Weight	250 g (0.55 lb)	